

INGENIO MAX

3-PHASE UPS

from 200 to 500 kW



English





INGENIO MAX BROCHURE

YOUR CRITICAL POWER SOLUTION PARTNER.

The Borri Group has been developing and building uninterruptible power systems since 1932 and is a global provider of power electronics systems and solutions for harsh industrial and demanding critical power requirements.

— Borri's R&D vast expertise in all facets of firmware, power electronics and mechanical design provides innovative solutions for tomorrow's problems in Industrial and Critical Power applications.

— The company prides itself on its first-class service and superior engineering disciplines. To ensure sustained quality, Borri manages all its processes in house from feed studies to design, production and after sales service technology.

— Based in Bibbiena, Italy with over 15,000 m² production area, Borri operates across all five continents with subsidiaries in USA, Canada, Germany, UAE, India and Malaysia.

— It has also established a strong distributor network, able to deliver on site support and technical guidance indicative of our own capabilities.



Critical Power Solutions

Designing and building mission critical UPS's 1- and 3-Phase up to 21 MW.



Industrial Power Solutions

Designing, engineering and building customised AC and DC power supply systems for harsh industrial applications.



Service

Borri team of experts support you to the highest standards no matter where you are in the world.




UPS 3-PHASE

INGENIO MAX

from 200 kW ——— to 500 kW



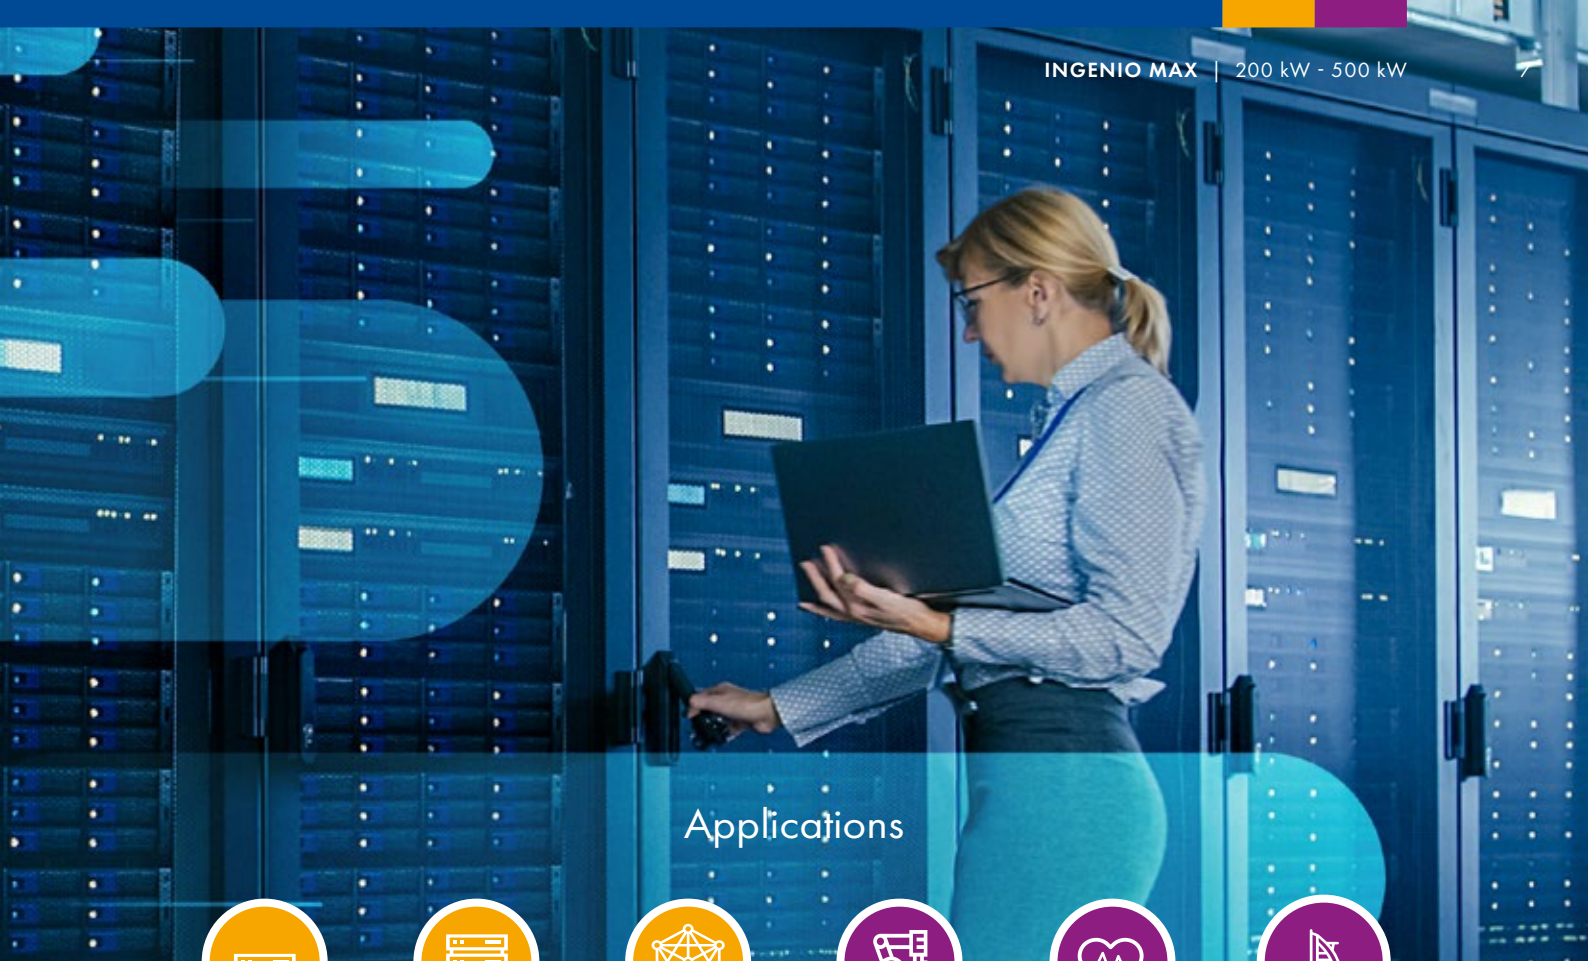

Applications



Medium data centre



Large data centre



Network & Server



Industrial controls & process automation



Medical equipment



Building automation

Very High Efficiency

Patented 3-level Green Conversion technology.

Compact footprint

Some of the most compact footprints on the market and full front access.

Reduced TCO

Flexible system up to 4 MW in a minimum space.

Low Total Cost of Ownership, high efficiency and compact solution for supplying reliable uninterrupted quality power to all critical applications in networking and medium to large data centre, health, finance, industrial processing, building and transportation markets and for TLC.


Ingenio Max: highest online efficiency in its class for a wide range of high power critical applications.



Features and benefits

- Three level Green Conversion, for enhanced system efficiency, very low noise and the lowest TCO in its category.
- Full output power rating ($pf=1$), ensuring optimal UPS sizing and high flexibility for all types of loads.
- On-line double conversion transformer-free design for low PUE and TCO.
- Full IGBT technology and electronic PFC, ensuring 0.99 input PF and $THDi < 3\%$ for maximum upstream sources compatibility.
- Dynamic Charging Mode (DCM) for maximum versatility in long autonomy and low charging time applications.
- Green Conversion Battery Care (GCBC) for extended battery service life.
- Increased power density, for unmatched floorspace saving.
- Comprehensive set of communication options for total remote monitoring of equipment operation.
- Fully compliant with international product standards for maximum quality guarantee.
- Colour touch screen 10" display for easy monitoring and control.
- Lithium Battery compatible.

Green Conversion Battery Care vs conventional float charge enhanced battery service life

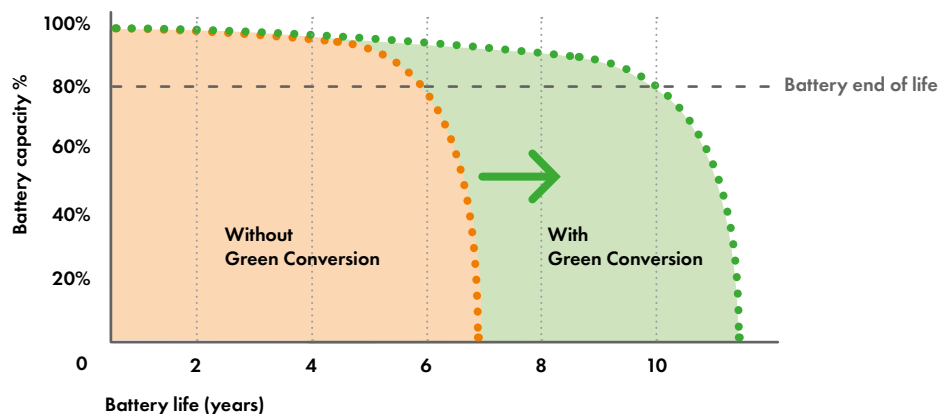

Main options

- Transformers/autotransformers for isolation or voltage adjustment.
- Battery voltage temperature compensation.
- External maintenance bypass wall-mounted box.
- Battery fuse switch wall-mounted box.
- Battery cabinets for long autonomy times.
- Parallel up to 8 units for system redundancy.
- Load-sync option.
- Common battery on selected models.
- Backfeed protection trip coil.

INGENIO MAX technical data

| Rating (kVA) | 200 | 250 | 300 | 400 | 500 |
|---|---|-----|-----|---------------|------|
| Nominal Power (kW) | 200 | 250 | 300 | 400 | 500 |
| UPS dimensions WxDxH (mm) | 880x970x1978 | | | 1430x970x1978 | |
| UPS weight (kg) | 530 | 745 | 675 | 1080 | 1250 |
| Battery configuration | External 360 to 372 cells, VRLA (other options) | | | | |
| Input | | | | | |
| Connection type | Hardwired 4w (rectifier), 4w (bypass) | | | | |
| Nominal voltage | 400 Vac 3-phase with neutral (rectifier); 380/400/415 Vac 3-phase with neutral (bypass) | | | | |
| Voltage tolerance | -20%, +15% (rectifier); ±10% (bypass) | | | | |
| Frequency and range | 50/60 Hz, 45 to 65 Hz | | | | |
| Power factor | >0.99 | | | | |
| Current distortion (THDi) | <3% | | | | |
| Output | | | | | |
| Connection type | Hardwired 4w | | | | |
| Nominal voltage | 380/400/415 Vac 3-phase with neutral | | | | |
| Frequency | 50/60 Hz | | | | |
| Voltage regulation | Static: ±1%; Dynamic: IEC/EN 62040-3 Class 1 | | | | |
| Power factor | Up to 1, without power derating | | | | |
| Overload capacity | Inverter: 110% for 10 min, 125% for 5 min, 150% for 30 s; Bypass: 150% continuous, 1000% for 1 cycle | | | | |
| Efficiency (AC/AC)* | Up to 99% | | | | |
| Classification by IEC/EN 62040-3 | VFI-SS-11 | | | | |
| Connectivity and function extensions | | | | | |
| Front panel | 10" colour touch screen display, 1024x600 pixels | | | | |
| Remote communication | <p>Included: serial RS232 and USB, backfeed protection monitoring contact, input terminal block (remote emergency power off, battery circuit breaker aux. cont., external maintenance bypass circuit breaker aux. cont., diesel mode aux. cont., external output circuit breaker aux. cont., remote transfer to bypass mode).</p> <p>Optional: SNMP adapter (Ethernet), Web interface (Ethernet), ModBus-TCP/IP (Ethernet), ModBus-RTU (RS485), from ModBus-RTU to PROFIBUS DP adapter; SPDT contact relay board; remote system monitoring panel; UPS managing and server shutdown software</p> | | | | |
| Optional features | Common battery; central bypass; cold start; Input /Output/Bypass isolation transformer; other I/O voltages 480/690 Vac with autotransformers; external maintenance bypass; battery fuse switch box; custom battery cabinets; battery thermal probe; parallel kit; load-sync for single UPS and load-sync box (3 UPS systems); top cable entry; backfeed tripping coil for bypass disconnect; other options on request | | | | |
| System | | | | | |
| Internal manual bypass | Included as standard | | | | |
| Protection degree | IP 20 | | | | |
| Colour | RAL 9005 | | | | |
| Installation layout | Wall, back to back and side by side installation allowed | | | | |
| Accessibility | Front access, bottom cable entry | | | | |
| * according to IEC/EN 62040-3 | | | | | |
| Other features | | | | | |
| Environmental | | | | | |
| Operating temperature range | 0°C to +40°C | | | | |
| Storage temperature range | -10°C to +70°C | | | | |
| Altitude (AMSL) | < 1000 m without power reduction, > 1000 m with reduction of 0.5% per 100 m | | | | |
| Audible noise at 1 m (dBA) | < 65 | | | | |
| Standards and certifications | | | | | |
| Quality assurance, environment, health and safety | ISO 9001:2015, ISO 14001:2015, BS OHSAS 18001:2007 | | | | |
| Safety | IEC/EN 62040-1 | | | | |
| EMC | IEC/EN 62040-2 | | | | |
| Environment aspects | IEC/EN 62040-4 | | | | |
| Test and performance | IEC/EN 62040-3 | | | | |
| Protection degree | IEC 60529 | | | | |
| Marking | CE | | | | |

GUARDIAN NET REMOTE DIAGNOSTICS AND PREVENTIVE MONITORING

Guardian Net improves Business Continuity by remote diagnostics and preventive monitoring of your UPS system and peripherals by preventing unpredictable anomalies to become failures.

Early detection of any deviations of critical parameter and prompt reaction in case of alarms result in extended uptime and enhanced operational efficiency. Real time monitoring and periodic reports on the health of equipment provide complete peace of mind, delivering unparalleled support experience.



BORRI
GUARDIAN NET

BENEFITS

Extending Uptime

Together with a Borri Maintenance Contract, Guardian Net allows our Service specialists to take care of your system by monitoring its parameters and quickly reacting to anomalies.

Increasing Business Continuity

Guardian Net provides you with continuous monitoring of your system, giving you comprehensive operational awareness and providing technical recommendations and reports by Borri Service Centre for improving the quality and reliability of your system.

Reducing Total Cost of Ownership

Guardian Net is an on-site virtual Service specialist 24/7, monitoring all relevant parameters, maximizing system performance, reducing on-site maintenance and minimizing your total cost of ownership by extending the life of your critical equipment.

FEATURES

Web Proactive Maintenance

Our Service specialists monitor your equipment from the Borri Service Centre, analysing data and trends, to proactively recommend actions for ensuring equipment always performs at its best.

Warning and alarm notification

Guardian Net continuously monitors the system and should any critical parameters exceed the preset tolerance, it generates a warning or alarm notification to you and the Borri Service Centre. Our Service specialists will investigate the data, find the cause and take actions based on the customer's maintenance contract. This ensures that in case Service engineers are dispatched on-site, they arrive prepared for first time resolution, reducing downtime and increasing system availability.

Status Reports

The unit parameters are collected by our Service Centre and presented in periodic status reports. You will receive a comprehensive analysis of your equipment and its operational performance, as well as demonstration that it is under continuous remote monitoring.

Total Service Support

Borri supports critical infrastructures with a comprehensive offering of their Service specialists, enhancing system availability and ensuring total peace of mind 24/7.

Data Manager Unit (DMU) technical data

| | |
|-------------------------------|---|
| To monitored device | |
| Communication port | RS485 ModBus |
| Protocol | ModBus-RTU/ASCII slave |
| Max no. of connected devices* | 16 |
| To Service Centre | |
| Communication port | RJ45 Ethernet |
| Protocol | Open VPN (based on Open SSL), http, SMTP, ModBus-TCP/IP |
| Services | Web Server, NTP time stamping |
| Notification | Included: email - Optional: text message via https or via RS232 modem |
| Options | |
| | 30 h backup battery, system integrator version (no box), GSM/GPRS modem (SIM card not included) |
| System | |
| Power supply | 100 to 240 Vac |
| Installation | Wall-mounted box |
| Dimensions WxDxH (mm) | 400x200x400 |
| Weight | 15 kg (w/ backup battery), 12 kg (w/o backup battery) |
| Protection degree | IP 20 (IP 65 on request) |
| Colour | RAL 7035 |
| Environmental | |
| Operating temperature range | 0°C to 40°C |
| Storage temperature range | -10°C to 70°C |

*conditions apply

SERVICE

Customer's expectation defines Borri's priority from the early analysis of the project requirements to a worldwide commissioning and service. Many thousands of systems have been successfully installed and maintained globally, with continuous support from a highly trained team of expert, certified technicians and engineers. From the professional set-up of Borri's training centre or on site, the training and service team stand ready to provide support and contribute to tailored training at Borri or on site. You can be assured of Borri support to the highest standards no matter where in the world you are.



Planning, installation, commissioning

Borri assist you in every single step of your project. Our R&D team can analyse and develop solutions to a wide range of edge system requirements.



Analytical tests

Borri undertakes a series of analytical tests in order to guarantee higher efficiency and continuity to your system operation.



Repair & spare parts

All spare parts supplied by Borri are original, tested and guaranteed to be fully compliant with Borri solutions.



Remote monitoring

Guardian Net remote monitoring system allows you to detect any deviation from optimum operation and trigger proper and immediate response, so that anomalies don't evolve into issues.



Maintenance

Preventive maintenance guarantees uninterrupted operations and optimised system efficiency.



Battery tests

Batteries have a limited time life and their proper maintenance is of high importance to guarantee efficiency to the UPS and avoid potential failures. Borri delivers high quality and performing batteries to assure smooth operations.



Training

Borri offers distributors and customers a service training structured in 3 levels. Courses can be held in Borri training centres or on-site.

Since 1932,
securing your
power with passion
and commitment.





www.borri.it

**BORRI HEADQUARTERS
AND FACTORY**

Borri S.p.A

Via 8 Marzo, 2
52011 Bibbiena (AR)
Italy
Tel. +39 0575 5351
Fax +39 0575 561811
info@borri.it

**BORRI SUBSIDIARIES
AND SERVICE CENTRES**

Asia Pacific

Borri Asia Pacific
Engineering Sdn. Bhd.

No.13, Jalan Serendah 26/41,
Sekitar 26, Seksyen 26,
40400 Shah Alam, Selangor
Malaysia
Tel. +60 3 5191 9098
Fax +60 3 5103 8728
sales@borri-asia.com

Canada

Borri Power Systems
North America Inc.

205 - 3689 E 1st Ave.
Vancouver, BC V5M 1C2
Canada
Tel. +1 604 428 7455
Fax +1 346 980 8875
info@borripower.com

Middle East and Africa

Borri Power
Middle East FZCO

1-151, Techno Hub
PO Box: 342036
Dubai Silicon Oasis, Dubai UAE
Tel. +971 4 3200528
Fax +971 4 3200529
info@mea.borripower.com

India

Borri Power India Pvt. Ltd.

Plot No. 69, Ground Floor
Nagarjuna Hills, Panjagutta
Hyderabad, 500 082
India
Tel. +91 40 2335 4095
info@mea.borripower.com

Germany

Borri Power Germany GmbH

Gewerbstraße 10
26789 Leer
Germany
Tel. +49 491 99 75 61 83
Fax +49 491 99 75 61 84
info@borri.de
service@borri.de

USA

Borri Power (US) Inc.

9000 Clay Road, Suit 104
Houston, Texas, 77080
USA
Tel. +1 346 212 2686
Fax +1 346 980 8875
info@borripower.com